



RoHS
Compliant
2011/65/EU

Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min

Withstand Voltage: AC250V 1minute




Mechanical:

Operating Stroke: 0.20±0.1mm



Operating Force: See chart

Operating Life: 100,000 cycles

0.20±0.1
Travel

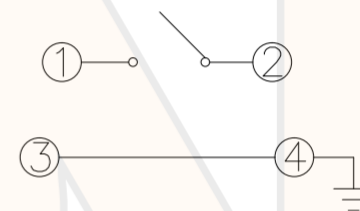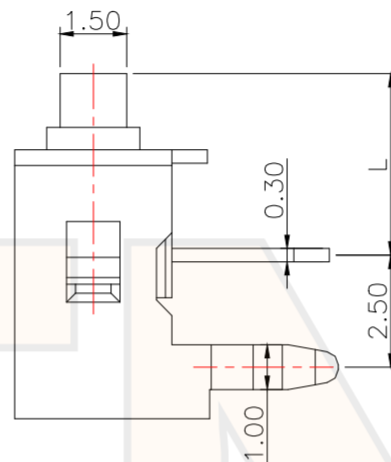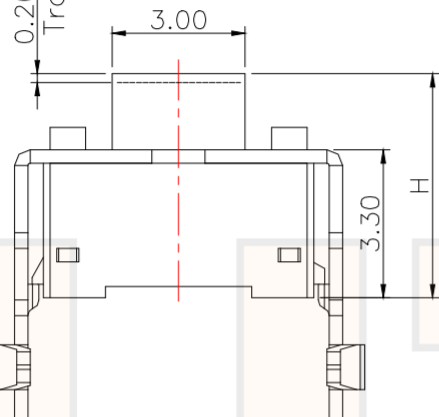

Circuit Diagram

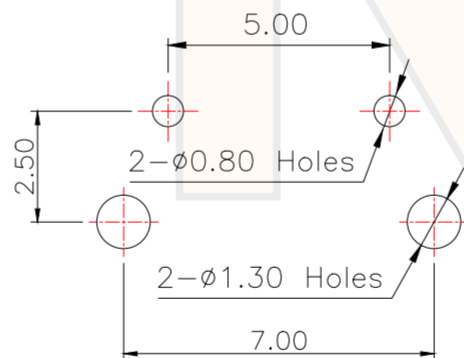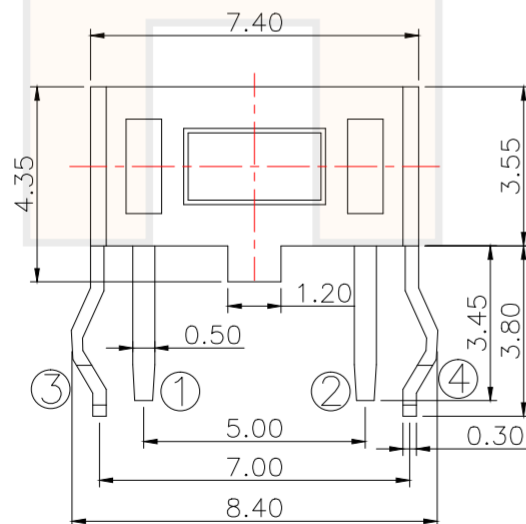

PCB Layout (Pattern Side)

NO.1		
PART NO	H	L
A	4.3	3.35
C	5.0	4.05

NO.2	
PART NO	VIGOR
3	180±30
4	250±50

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
SCALE	1:1	UNIT:mm
	SIZE:A4	SHEET:1/1

DRAW:	Jebnn 2019/05/08
CHKD:	Lucky 2019/05/08
APPROVED:	Allen 2019/05/08
	www.htnn.com.tw

HTNN

TITLE:
TACT SWITCH

PART NO.: TS1101ATxx
DWG NO.: HTS1101AT

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION