



RoHS
Compliant
2011/65/EU

Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min



Withstand Voltage: AC250V 1minute

Mechanical:





Operating Stroke: 0.25±0.1mm

Operating Force: See chart

Operating Life: 100,000 cycles

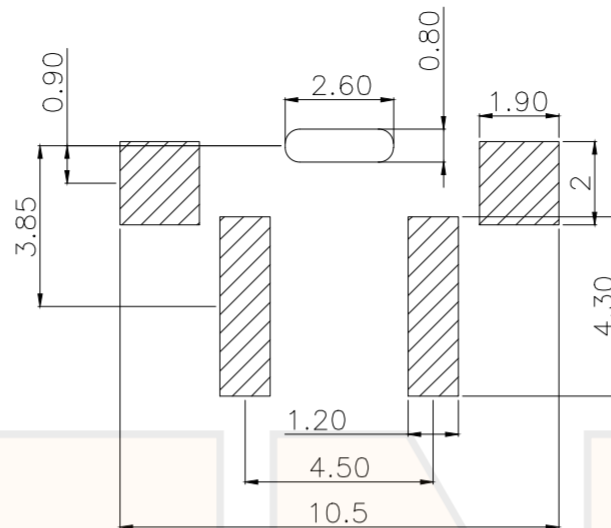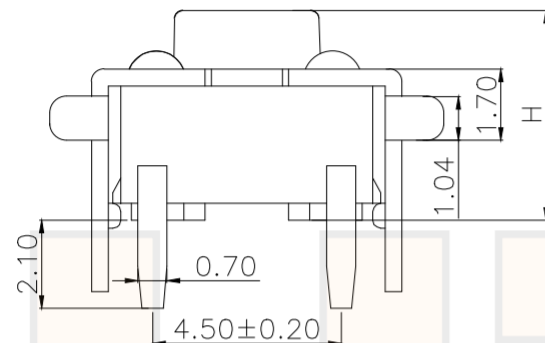

PCB Layout(Pattern Side)

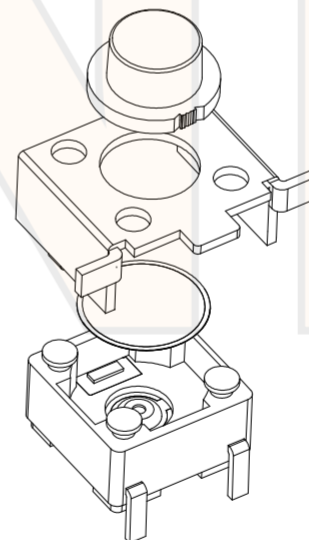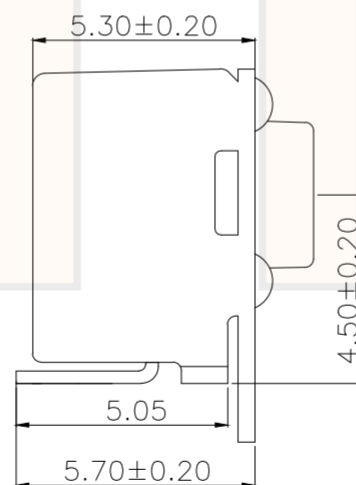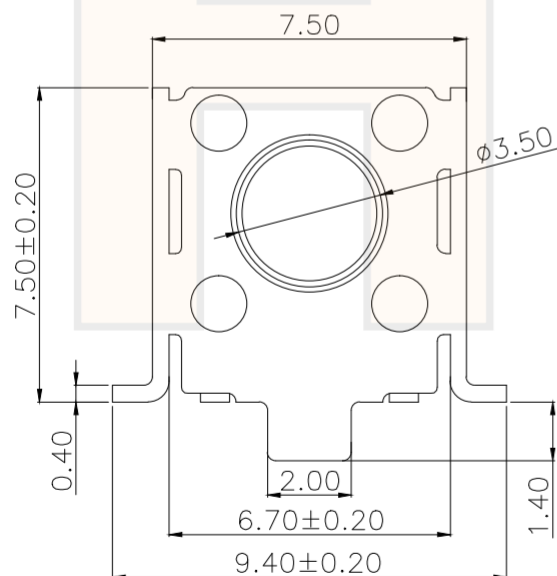

Circuit diagram

NO.1	
PART NO	H
A	4.3
B	4.5
C	5
D	5.5
E	6
F	6.5
G	7
H	7.5
I	8

NO.2	
PART NO	vigor
2	130±30
3	180±30
4	250±50

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
SCALE	1:1	UNIT:mm
	SIZE:A4	SHEET:1/1

DRAW:	Jebnn	2019/03/22
CHKD:	Lucky	2019/03/22
APPROVED:	Allen	2019/03/23
www.htnn.com.tw		

HTNN

TITLE:
TACT SWITCH

PART NO.: TS1101HWxx
DWG NO.: HTS1101HW

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION