



RoHS
Compliant
2011/65/EU

Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min



Withstand Voltage: AC250V 1minute

Mechanical:




Operating Stroke: 0.35±0.1mm

Operating Force: See chart

Operating Life: 100,000 cycles

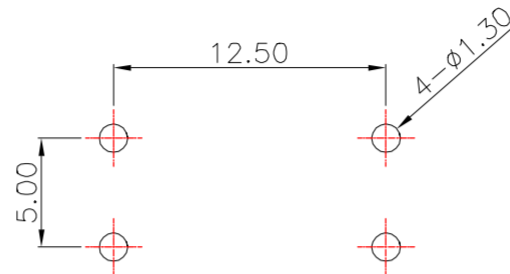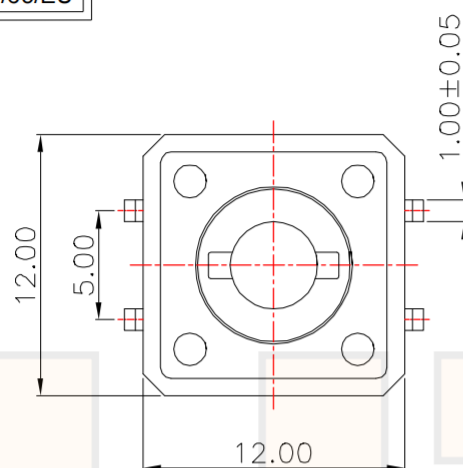

PCB Layout(Pattern side)

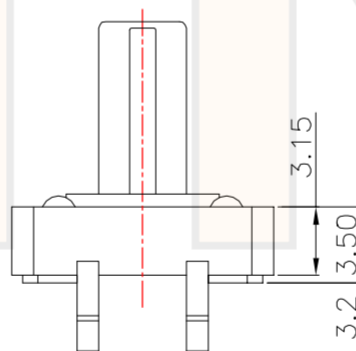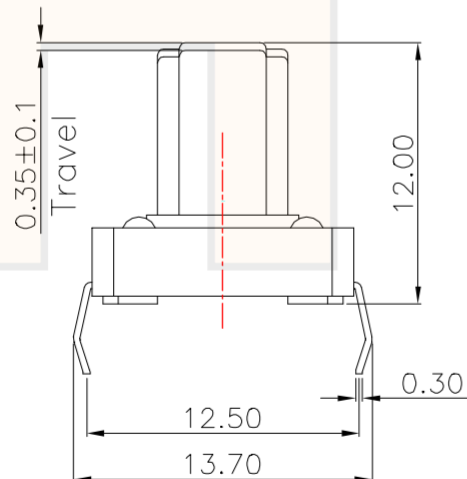

Circuit Diagram

NO.1	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

						GENERAL TOLERANCES			DRAW:		HTNN	
						ANGLES	ANG.	± 5°	Jebnn	2013/12/16		
						LINEAR	X.	± 0.30	CHKD:	2013/12/16		
							X.X	± 0.25	Lucky			
A	_____	_____	NEW	_____	_____		X.XX	± 0.20	APPROVED:			
REV	ECN NO.	DATE	DESCRIPTIION	CHANGE	DATE	SCALE	1:1	UNIT:mm	Allen	2013/12/17		TITLE:
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD. LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							SIZE:A4	SHEET:1/1	www.htnn.com.tw	PART NO.: TS1103DMx		
										DWG NO.: HTS1103DM		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION