

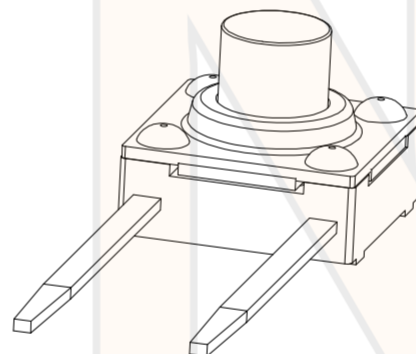
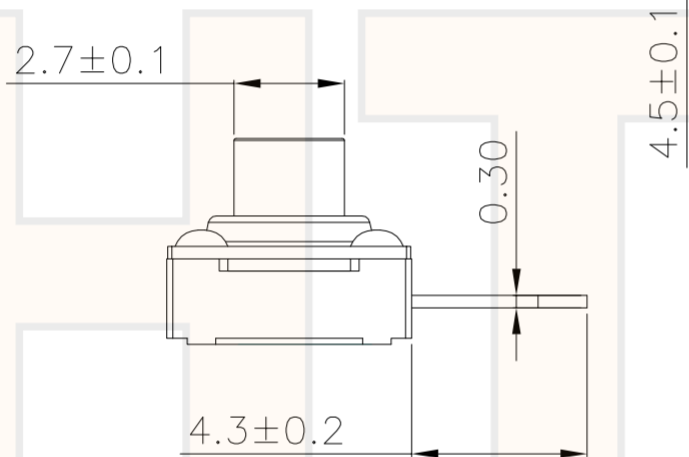
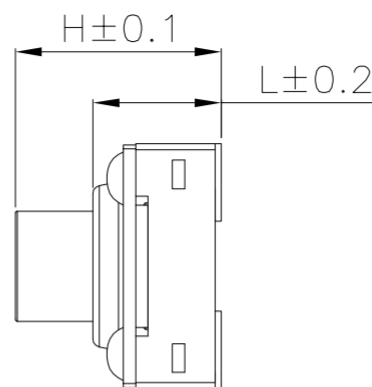
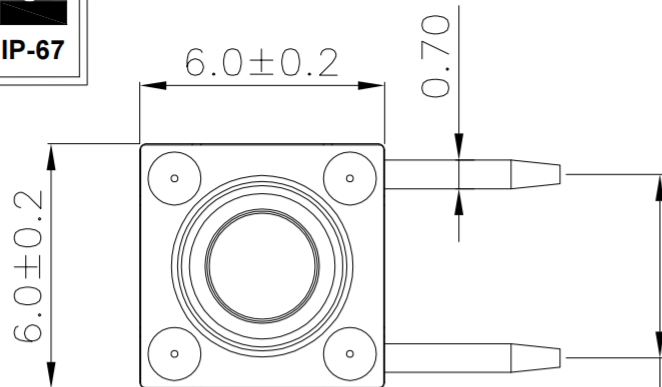


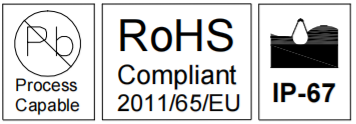


Specifications:
Electrical:
Rating: DC 12V 50mA
Contact Resistance: 100mΩ Max
Insulation Resistance: 100mΩ Min
Withstand Voltage: AC250V 1minute
Mechanical:
Operating Stroke: 0.30±0.1mm
Operating Force: 250±50gf
Operating Life: 100,000 cycles



Circuit Diagram

NO.1			
PART NO	H	L	Keystoke
B	3.3	2.8	Black
A	4.3	3.15	Red
C	5.0		
G	7.0		
H	4.5		



PCB Layout(Pattern side)

GENERAL TOLERANCES			DRAW: Jebnn 2022/01/14	HTNN
ANGLES	ANG.	±5°		
LINEAR	X.	±0.30	CHKD: Lucky 2022/01/14	
	X.X	±0.25		
	X.XX	±0.20	APPROVED:	
SCALE	1:1	UNIT:mm	Allen 2022/01/15	TITLE: TACT SWITCH
	SIZE:A4	SHEET:1/1	www.htnn.com.tw	PART NO.: TS1110DFx
				DWG NO.: HTS1110DF

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION