





RoHS
Compliant
2011/65/EU

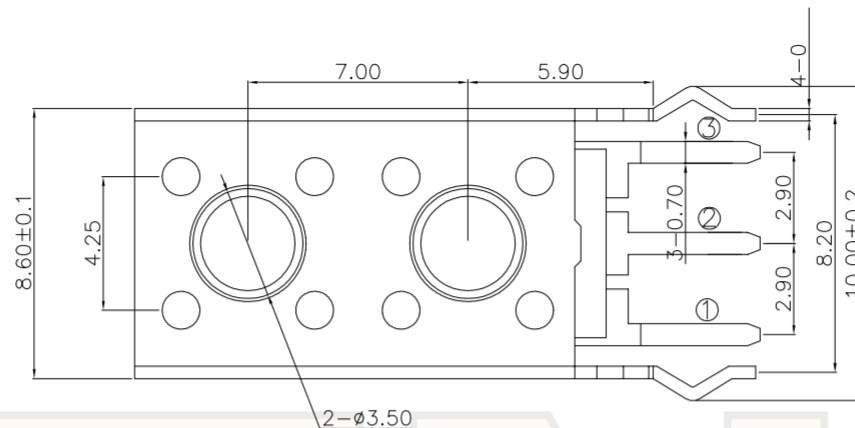

NO.1				
PART NO	L1	L2	H1	H2
A: 双联上5下5	1.4	1.4	3.65	3.65
B: 双联上5下10	1.4	6.4	3.65	8.65
C: 双联上7下10.5	3.4	6.9	5.65	9.15
D: 双联上10下5	6.4	1.4	8.65	3.65
E: 双联上10下7	6.4	3.4	8.65	5.65
F: 双联上10下10	6.4	6.4	8.65	8.65
G: 双联上11.5下11.5	7.9	7.9	10.15	10.15
H: 双联上10.5下10.5	6.9	6.9	9.15	9.15
L: 双联上15.5下5	11.9	1.4	14.15	3.65
M: 双联上11.5下17	7.9	13.4	10.15	15.65
N: 双联上17下17	13.4	13.4	15.65	15.65

NO.2	
PART NO	vigor
3	180±30
4	250±30



Circuit diagram

Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min



Withstand Voltage: AC250V 1minute

Mechanical:

Operating Stroke: 0.20±0.05mm

Operating Force: See chart

Operating Life: 50,000 cycles

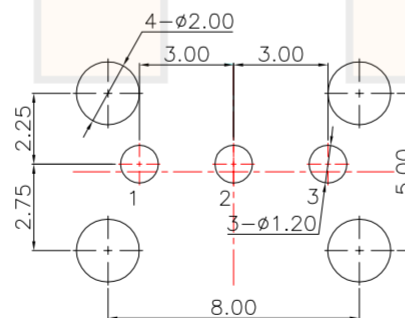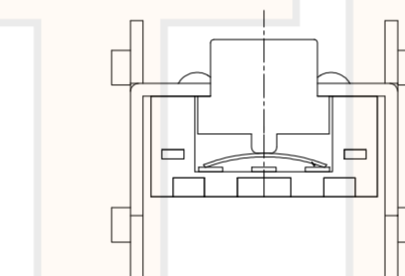

PCB Layout (Pattern Side)

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
SCALE	1:1	UNIT:mm
	SIZE:A4	SHEET:1/1

DRAW:	Jebnn 2016/04/11
CHKD:	Lucky 2016/04/11
APPROVED:	Allen 2016/04/12
	www.htnn.com.tw

HTNN

TITLE:
TACT SWITCH

PART NO.: TS1122DQxx

DWG NO.: HTS1122DQ

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION