



RoHS
Compliant
2011/65/EU



Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min






Withstand Voltage: AC250V 1minute

Mechanical:

Operating Stroke: 0.35±0.1mm

Operating Force: See chart

Operating Life: 500,000 cycles

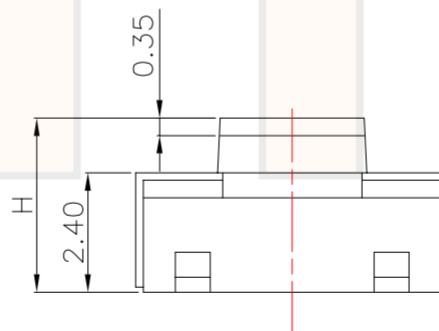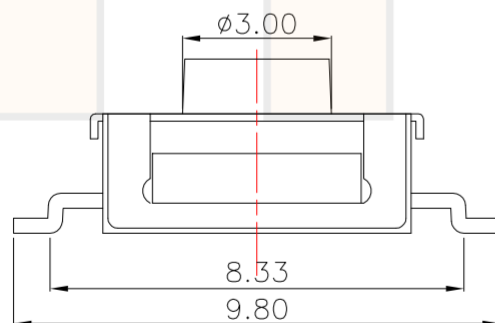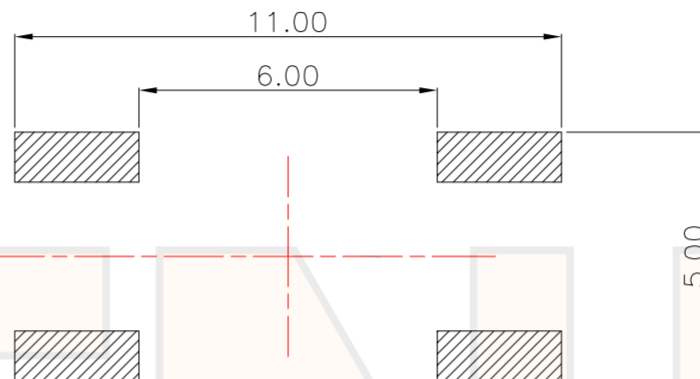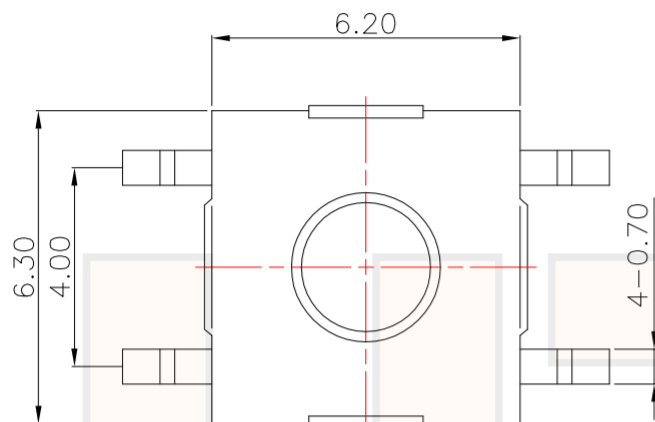

Circuit Diagram

NO.1

PART NO	H
C	3.1
D	3.5
A	3.8
G	4.3
B	4.5
M	4.8
N	5.2
E	5.5

NO.2

PART NO	vigor
3	180±30
4	250±30
5	350±50

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
SCALE	1:1	UNIT:mm
	SIZE:A4	SHEET:1/1

DRAW:	Jebnn 2020/05/16
CHKD:	Lucky 2020/05/16
APPROVED:	Allen 2020/05/17
www.htnn.com.tw	

HTNN

TITLE:
TACT SWITCH

PART NO.: TS1156SPxx
DWG NO.: HTS1156SP

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION