



RoHS
Compliant
2011/65/EU

Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min



Withstand Voltage: AC250V 1minute

Mechanical:


Operating Stroke: 0.25±0.1mm

Operating Force: See chart



Operating Life: 100,000 cycles

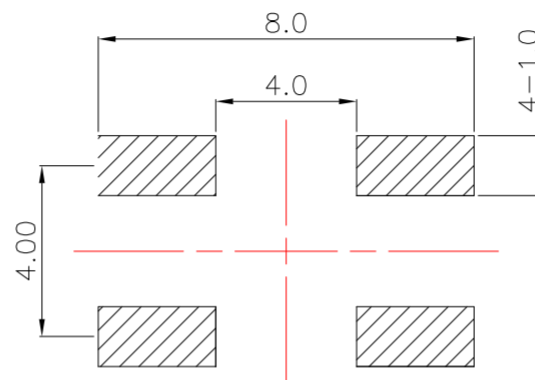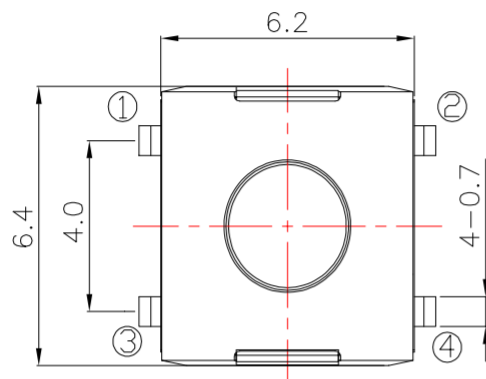

PCB Layout(Pattern side)



Circuit Diagram

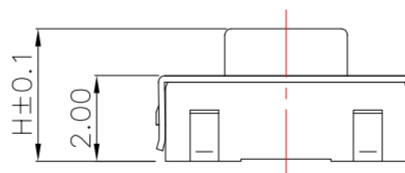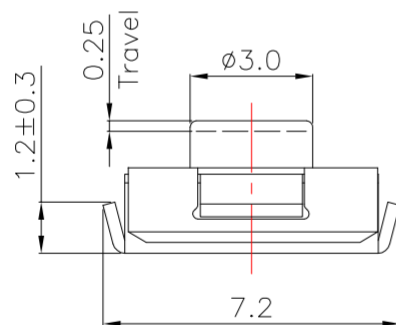

NO.1	
PART NO	H
B	2.5
C	3.1
D	3.4
E	5.5
F	5

NO.2	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
SCALE	1:1	UNIT:mm
SIZE:A4	SHEET:1/1	

DRAW:	Jebnn 2021/02/10
CHKD:	Lucky 2021/02/10
APPROVED:	Allen 2021/01/11
www.htnn.com.tw	

HTNN	
TITLE: TACT SWITCH	
PART NO.: TS1157UPxx	
DWG NO.: HTS1157UP	

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION