



RoHS
Compliant
2011/65/EU

Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min





Withstand Voltage: AC250V 1minute

Mechanical:

Operating Stroke: 0.15±0.05mm

Operating Force: See chart

Operating Life: 100,000 cycles

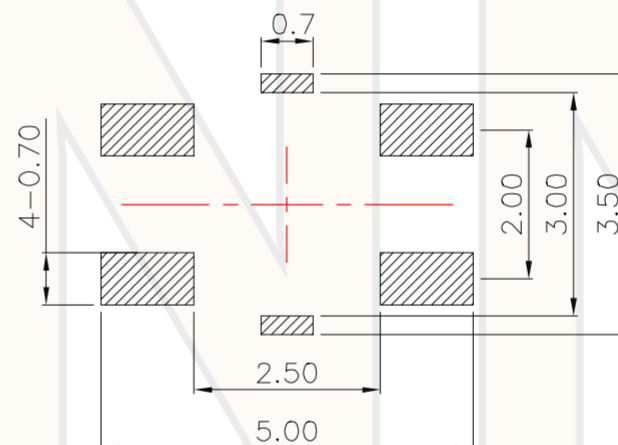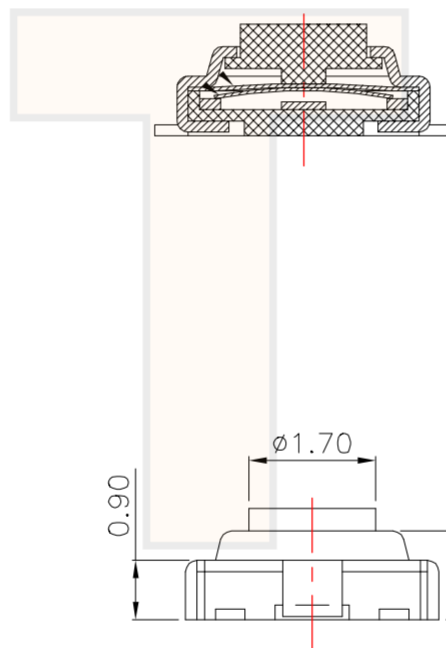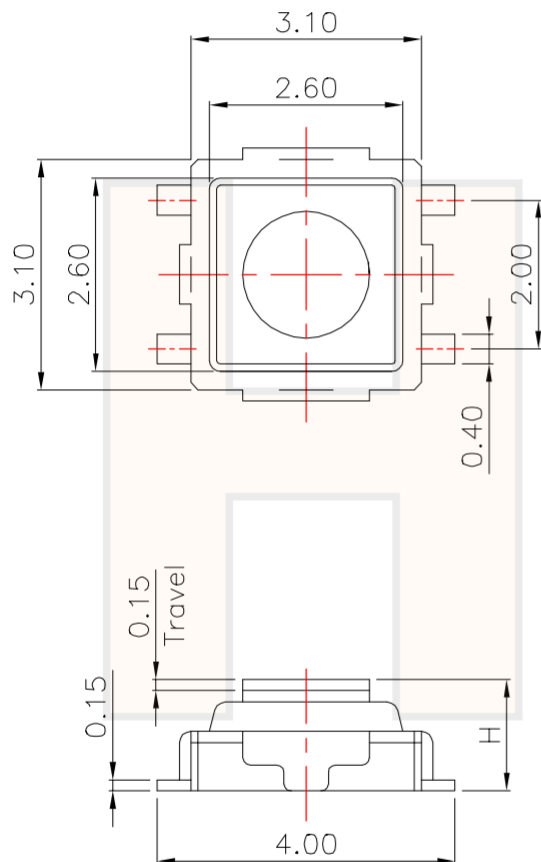

NO.1	
PART NO	H
A	1.5
D	2.0

NO.2	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
SCALE	1:1	UNIT:mm
SIZE:A4	SHEET:1/1	

DRAW:	Jebnn 2016/03/10
CHKD:	Lucky 2016/03/10
APPROVED:	Allen 2016/03/11
www.htnn.com.tw	

HTNN

TITLE:
TACT SWITCH

PART NO.: TS1177SWxx
DWG NO.: HTS1177SW

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION