





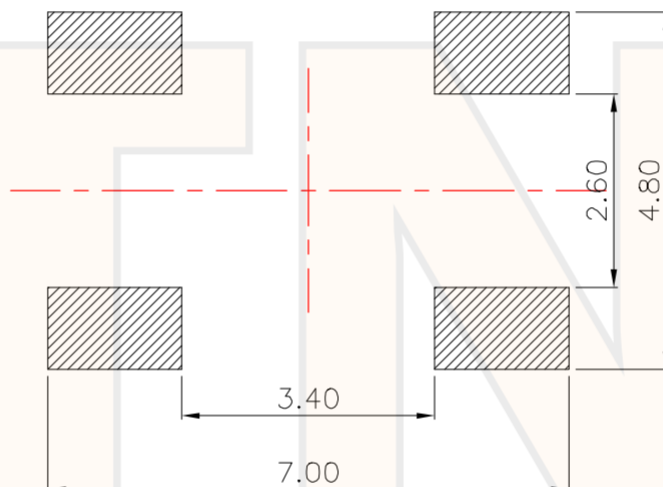


RoHS
Compliant
2011/65/EU

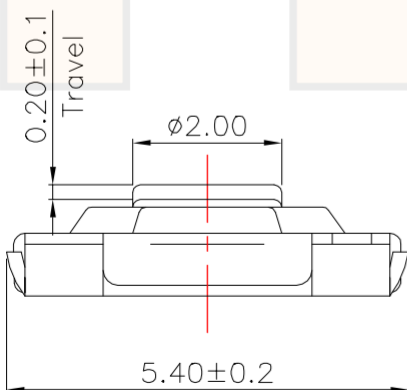

Circuit Diagram

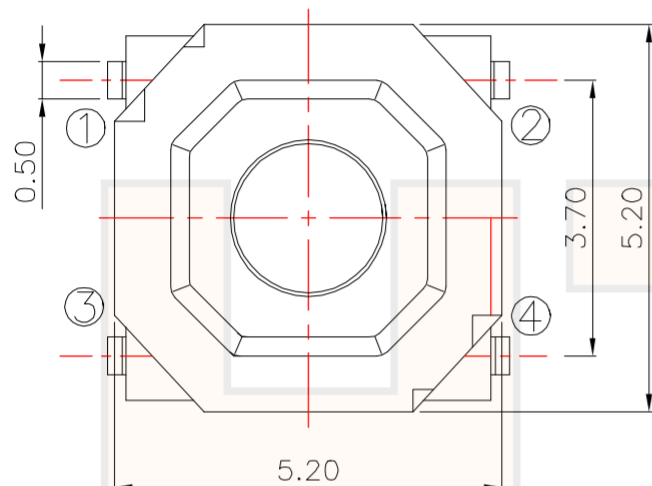

PCB Layout(Pattern side)

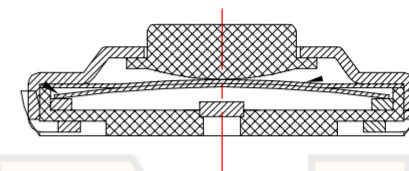

NO.1	
PART NO	H
A	1.50
B	1.60
C	1.70
D	2.00
E	2.50
F	3.00
G	4.30

NO.2	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min

Withstand Voltage: AC250V 1minute

Mechanical:

Operating Stroke: 0.20±0.1mm

Operating Force: See chart

Operating Life: 100,000 cycles

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
SCALE	1:1	UNIT:mm
	SIZE:A4	SHEET:1/1

DRAW:	Jebnn 2013/05/09
CHKD:	Lucky 2013/05/09
APPROVED:	Allen 2013/05/10
	www.htnn.com.tw

HTNN

TITLE:
TACT SWITCH

PART NO.: TS1187UQxx
DWG NO.: HTS1187UQ

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION