





RoHS
Compliant
2011/65/EU

Specifications:
Electrical:
 Rating: DC 12V 50mA
 Contact Resistance: 100mΩ Max
 Insulation Resistance: 100mΩ Min
 Withstand Voltage: AC250V 1minute
Mechanical:
 Operating Stroke: 0.15±0.05mm
 Operating Force: See chart
 Operating Life: 100,000 cycles

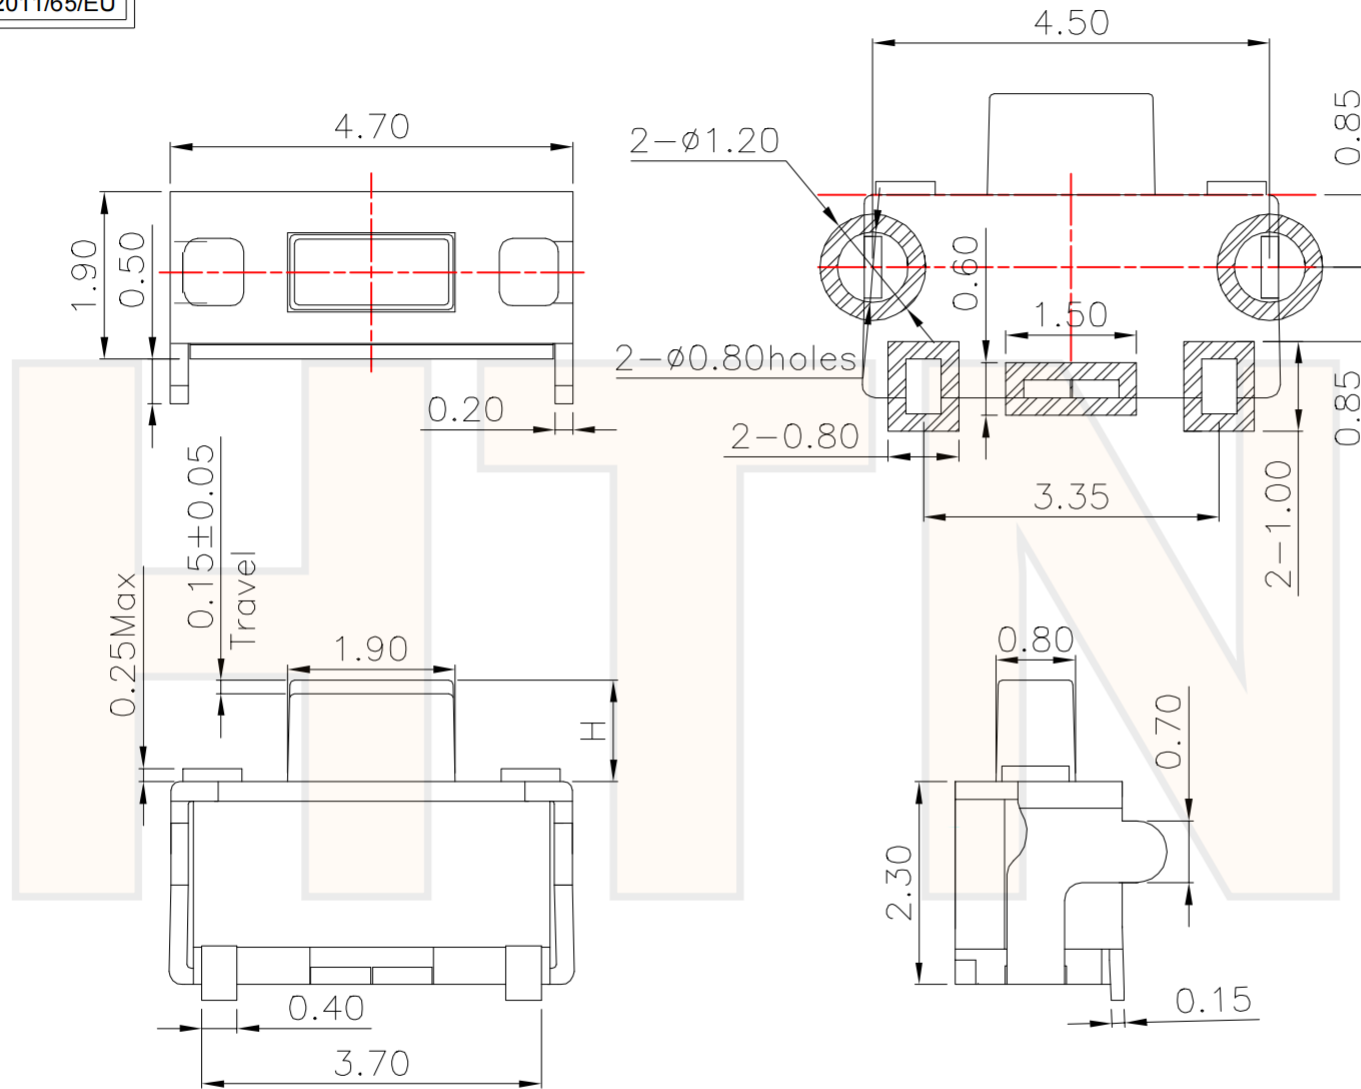

NO.1

PART NO	H
A	1.2
B	1.5

NO.2

PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
SCALE	1:1	UNIT:mm
	SIZE:A4	SHEET:1/1

DRAW:
Jebnn 2013/05/09
CHKD:
Lucky 2013/05/09
APPROVED:
Allen 2013/05/10
www.htnn.com.tw

HTNN

TITLE:
TACT SWITCH
PART NO.: TS1806ANxx
DWG NO.: HTS1806AN

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION