



RoHS
Compliant
2011/65/EU

Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min


Withstand Voltage: AC250V 1minute

Mechanical:

Operating Stroke: 0.15±0.05mm

Operating Force: See chart

Operating Life: 100,000 cycles



Circuit Diagram




NO.1

PART NO	H
A	1.2
B	0.9
C	1.5

NO.2

PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

PCB Layout(Pattern side)

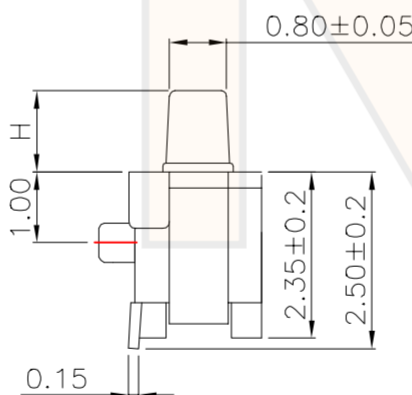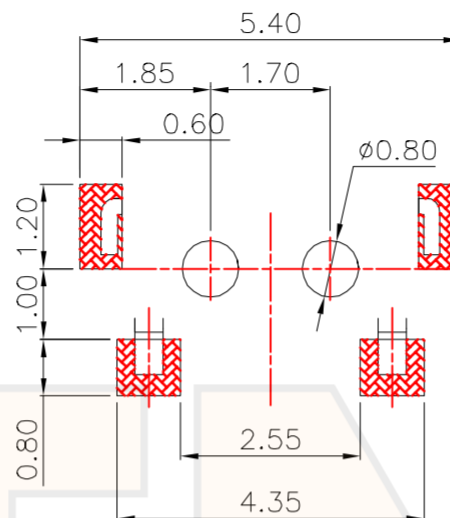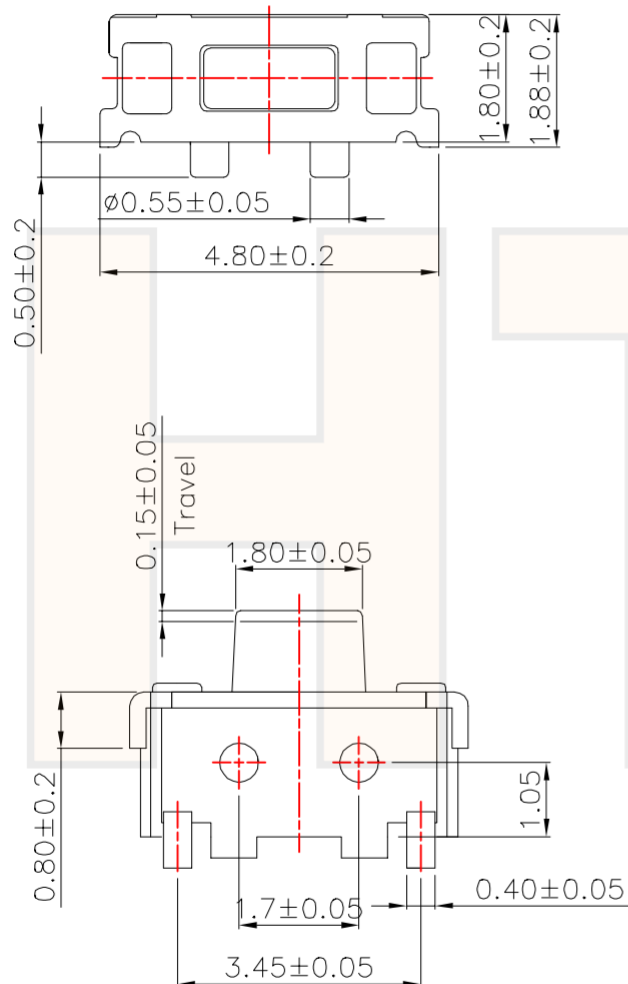

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
SCALE	1:1	UNIT:mm
	SIZE:A4	SHEET:1/1

DRAW:	Jebnn 2013/05/09
CHKD:	Lucky 2013/05/09
APPROVED:	Allen 2013/05/10
www.htnn.com.tw	

HTNN

TITLE:
TACT SWITCH

PART NO.: TS1806SAxx
DWG NO.: HTS1806SA

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION