



RoHS
Compliant
2011/65/EU

Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min




Withstand Voltage: AC250V 1minute

Mechanical:

Operating Stroke: 0.20±0.05mm


Operating Force: See chart

Operating Life: 100,000 cycles

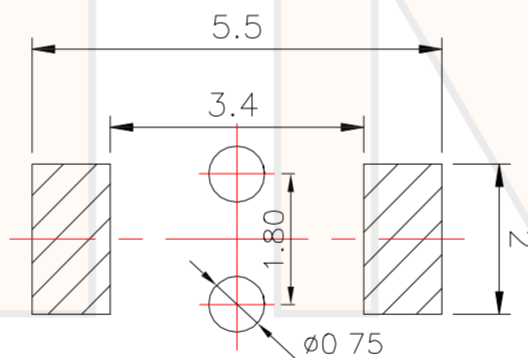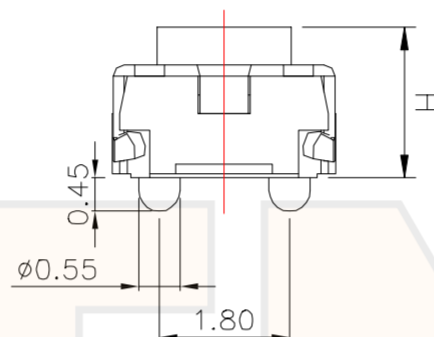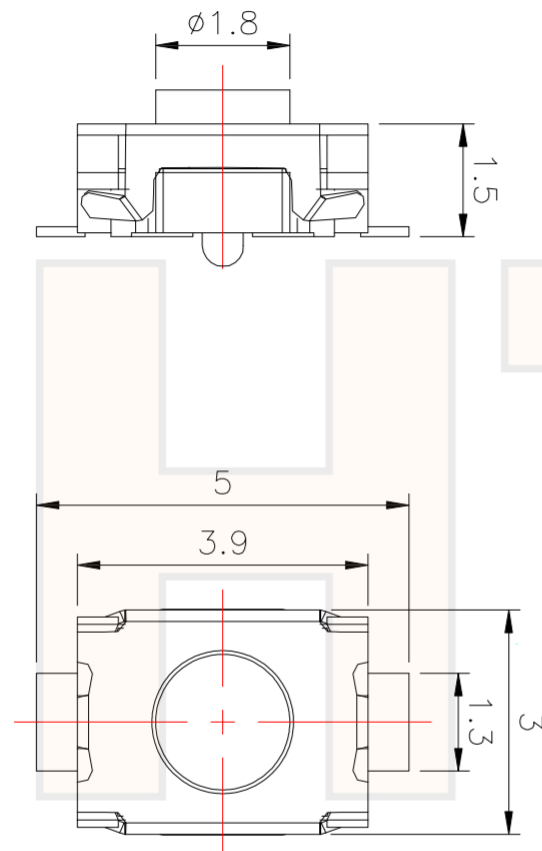


PCB Lavout

NO.1	
PART NO	H
A	2.0
B	2.5
C	3.0



Circuit diagram

NO.2	
PART NO	VIGOR
1	90±30
3	180±30
4	250±30

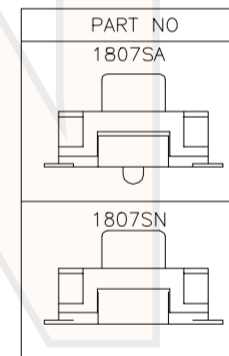

						GENERAL TOLERANCES			DRAW:		HTNN	
						ANGLES	ANG.	± 5°	Jebnn	2014/03/07		
						LINEAR	X.	± 0.30	CHKD:	Lucky		2014/03/07
							X.X	± 0.25				
A	_____	_____	NEW	_____	_____		X.XX	± 0.20	APPROVED:			
REV	ECN NO.	DATE	DESCRIPTIION	CHANGE	DATE	SCALE	1:1	UNIT:mm	Allen	2014/03/08		TITLE:
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							SIZE:A4	SHEET:1/1	www.htnn.com.tw			PART NO.: TS1107SAxx
												DWG NO.: HTS1107SA