



RoHS
Compliant
2011/65/EU

Specifications:

Electrical:

Rating: DC 12V 50mA

Contact Resistance: 100mΩ Max

Insulation Resistance: 100mΩ Min



Withstand Voltage: AC250V 1minute

Mechanical:




Operating Stroke: 1.3±0.2mm

Operating Force: See chart

Operating Life: 100,000 cycles

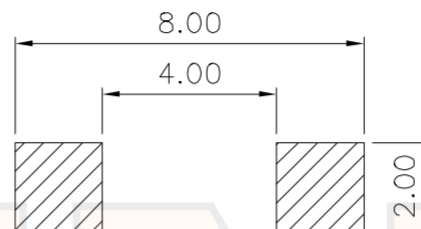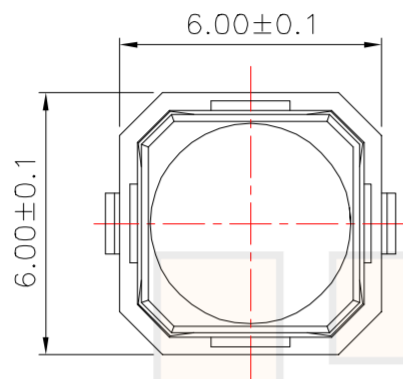

PCB Layout(Pattern side)

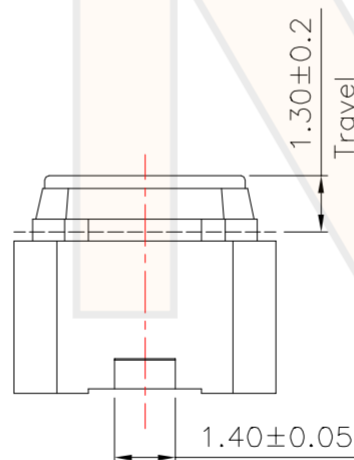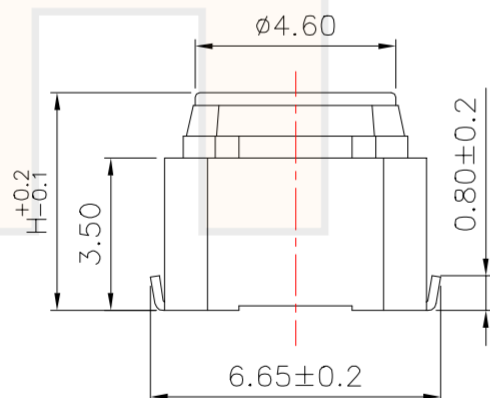

Circuit Diagram

NO.1	
PART NO	H
A	4.3
C	5

NO.2	
PART NO	vigor
3	180±30
4	250±30
6	300±30

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
SCALE	1:1	UNIT:mm
	SIZE:A4	SHEET:1/1

DRAW:	Jebnn 2014/05/16
CHKD:	Lucky 2014/05/16
APPROVED:	Allen 2014/05/17
	www.htnn.com.tw

HTNN

TITLE:
TACT SWITCH

PART NO.: TS1817UQxx
DWG NO.: HTS1817UQ

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION