




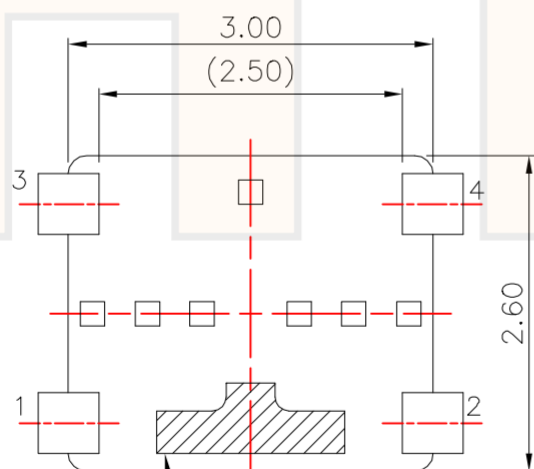


RoHS
Compliant
2011/65/EU

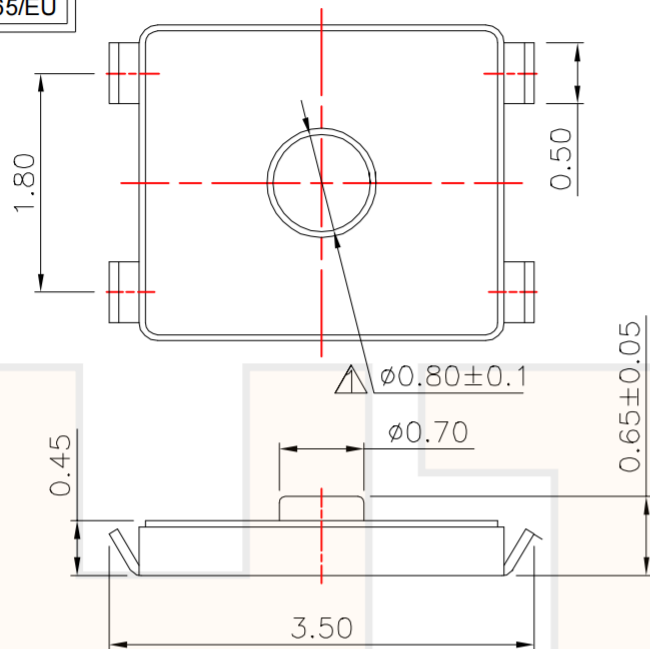


1.2 Terminal bottom exposed area
PCB circuit prohibited

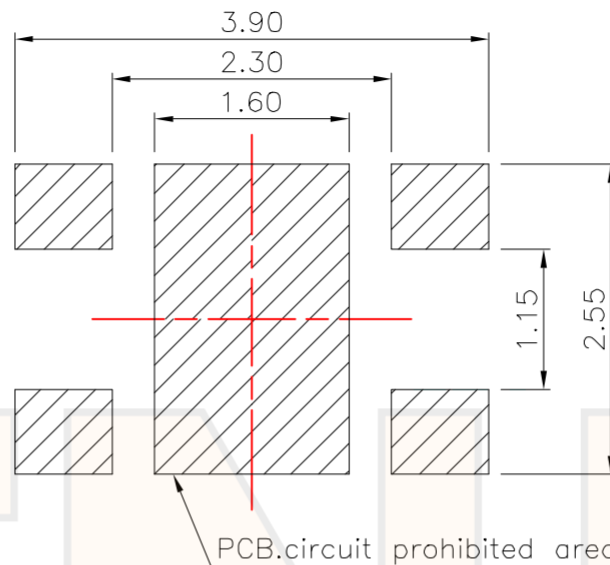

PCB Layout (Pattern Side)



Specifications:
Electrical:
Rating: DC 12V 50mA
Contact Resistance: 100mΩ Max
Insulation Resistance: 100mΩ Min
Withstand Voltage: AC250V 1minute
Mechanical:
Operating Stroke: 0.15±0.05mm
Operating Force: See chart
Operating Life: 300,000 cycles



Circuit Diagram

NO.1

PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

GENERAL TOLERANCES		
ANGLES	ANG.	±5°
LINEAR	X.	±0.30
	X.X	±0.25
	X.XX	±0.20
	1:1	UNIT:mm
SCALE	SIZE:A4	SHEET:1/1

DRAW:
Jebnn 2014/08/07
CHKD:
Lucky 2014/08/07
APPROVED:
Allen 2014/08/08
www.htnn.com.tw

HTNN

TITLE:
TACT SWITCH

PART NO.: TS1828UQx
DWG NO.: HTS1828UQ

REV	ECN NO.	DATE	DESCRIPTION	CHANGE	DATE
B					
A			NEW		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO HTNN TECHNOLOGY CO.,LTD, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION